LONSEAL

LONWOOD PERFORMA

LONWOOD PERFORMA is designed for interior use in high-volume foot traffic and high-impact athletic and aerobic applications. With its substantial foam layer it provides an exceptioal anti-fatigue flooring option.

STANDARD SIZES (nominal)

Overall thickness: 0.217" (5.5 mm)
Wear layer thickness: 0.020" (0.5 mm)
Roll size: 6' (1.8 m) wide x 60' (18.3 m)
Weight: 1.26 lbs./sq. ft., 455 lbs./roll


Colors: Two available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 10% post-industrial recycled content
 - Contributes towards LEED MR 4.1
- FloorScore[®] Indoor Air Quality Certified
 Conforms to CA Specification 01350
- LEED Low Emitting Materials
- Adhesives and Sealants: IEQ Credit 4.1
- Flooring Systems: IEQ Credit 4.3



Lonseal offers a 15-year limited warranty. (Heat weld all seams.)

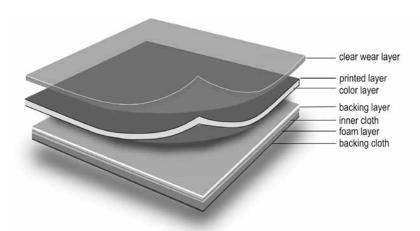

W548 Pattern Repeat: (nominal) Machine Direction: 35.8" (910 mm) Cross Direction: 17.8" (451 mm)

W550 Pattern Repeat: (nominal) Machine Direction: 37.4" (950 mm) Cross Direction: 24.4" (621 mm)

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303Type 1, Grade1, Class C	
Flexibility, ASTM F137	Pass
Hardness, ASTM D2240	90
James Machine, SCOF, ASTM D2047	Neolite: 0.93, Neolite w/ Finish: 0.98
Abrasion Resistance, ASTM D3884	0.23%, 1,000 cycles
Static Load (max 0.005"), ASTM F970	450 psi
Short-term Indentation, ASTM F1914	0.002" residual indentation @ 75 lbs.
Castor Chair Test, ISO TR4918	25,000 cycles - Wear: 4.3, Color: 4.0, Change: 4.4
Dimensional Stability, ASTM F2199	0.07% loss
Heat Stability, ASTM F1514	Pass
Light Stability, ASTM F1515	Pass
Critical Radiant Flux, ASTM E648	Class 1 ≥0.45 watts/cm ²
Chemical Resistance, ASTM F925	

For detailed technical information, please refer to www.lonseal.com.







LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 04.15.14