

LONZEBRA with Topseal

LONSEAL

LONZEBRA pairs the warm aesthetic of wood with the design impact of resilient surfaces. Its striated linear pattern is not only visually appealing, but also serves to mask dirt and other blemishes.

Topseal is Lonseal's factory-applied urethane finish that protects the floor, reduces scuffing and simplifies routine maintenance. Topseal is applied in a 30-micron wear layer and extends the life of the flooring by protecting it from wear due to staining, soiling and scuffing.

STANDARD SIZES (nominal)

Overall thickness: 0.080" (2.0 mm)

Wear layer thickness: 0.020" (0.5 mm)


Roll size: 6' (1.8 m) wide x 60' (18.3 m)

Weight: 0.6 lbs./sq. ft., 220 lbs./roll

Colors: Seven available

GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 35% post-industrial recycled content
 - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
 - Conforms to CA Specification 01350
- LEED Low Emitting Materials
 - Adhesives and Sealants: IEQ Credit 4.1
 - Flooring Systems: IEQ Credit 4.3

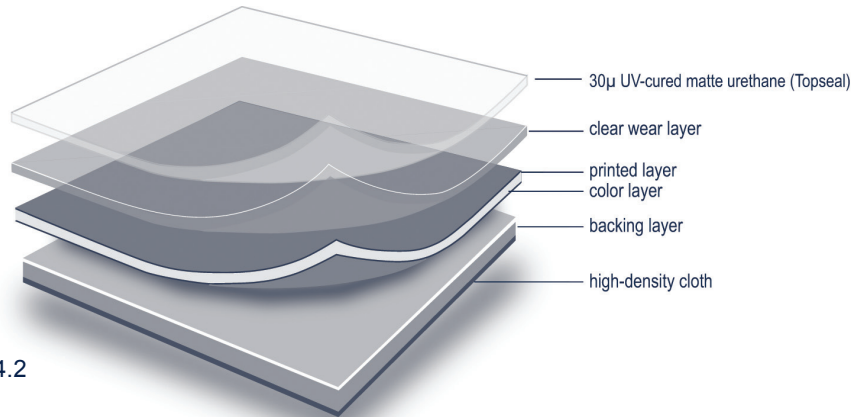

Pattern Repeat: (nominal)
Machine Direction: 49.0" (1,244 mm)
Cross Direction: 26.9" (684 mm)

10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

TECHNICAL DATA

Sheet Vinyl Floor Covering with Backing, ASTM F1303.....	Type 1, Grade1, Class B
James Machine, SCOF, ASTM D2047.....	Neolite: 1.00
Hardness, ASTM D2240.....	95
Abrasion Resistance, ASTM D3884.....	0.45%, 1,000 cycles
Critical Radiant Flux, ASTM E648.....	Class 1 ≥ 0.45 watts/cm ²
Flexibility, ASTM F137.....	Pass
Chemical Resistance, ASTM F925.....	No Change
Static Load (max 0.005"), ASTM F970*.....	500 psi
Heat Stability, ASTM F1514.....	Pass
Light Stability, ASTM F1515.....	Pass
Short-term Indentation, ASTM F1914.....	0.007" residual indentation @ 75 lbs.
Dimensional Stability, ASTM F2199.....	0.65% loss
Rolling Chair Test, ISO TR 4918.....	5.0 @ 25,000 cycles

*When test parameters exceed the Precision and Bias of the standard, accuracy and consistency of the results will vary. This information is provided as a reference only, and may not be indicative of the materials actual performance.

For detailed technical information, please refer to www.lonseal.com.



CERTIFIED BY
SCS Global Services



LONSEAL, INC.
928 E. 238th Street, Carson, CA 90745 USA
800.832.7111 toll free | 310.830.7111 ph
www.lonseal.com



Updated: 03.11.15