


The Loncoin series boasts a coin surface embossing that delivers a striking directional design — a decorative touch that provides style and enhanced traction. LONCOIN II features a slight texture on the coin stamping which gives surface grip and helps mask scuffing. It is available in a palette of five subdued yet arresting colors.

### STANDARD SIZES (nominal)

- Overall thickness:** 0.100" (2.5 mm)
- Wear layer thickness:** 0.031" (0.8 mm)
- Roll size:** 6' (1.8 m) wide x 60' (18.3 m)
- Weight:** 0.8 lbs./sq. ft., 295 lbs./roll
- Colors:** Five available

### GREEN FEATURES

- GreenMedic™: Formulated for microbial resistance
- GreenAir™: Formulated for low VOCs
- 20 - 40% post-industrial recycled content
  - Contributes towards LEED MR 4.1 and MR 4.2
- FloorScore® Indoor Air Quality Certified
  - Conforms to CA Specification 01350
- LEED Low Emitting Materials
  - Adhesives and Sealants: LEED IEQ Credit 4.1
  - Flooring Systems: LEED IEQ Credit 4.3

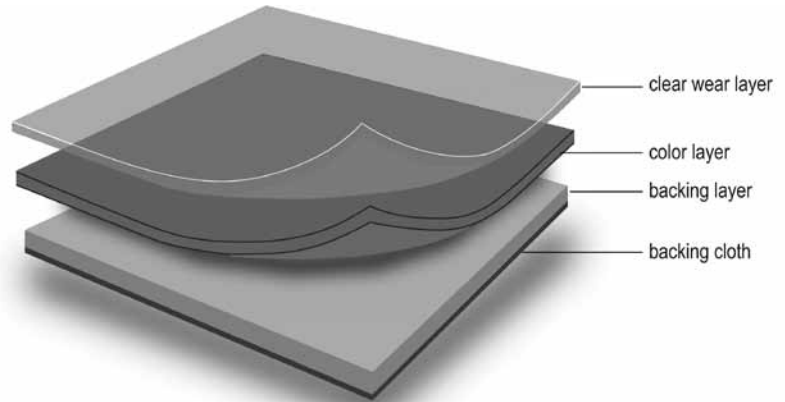

### 10-YEAR WARRANTY

Lonseal offers a 10-year limited warranty.

### TECHNICAL DATA

<b>Sheet Vinyl Floor Covering with Backing, ASTM F1303</b> .....	Type 1, Grade1, Class B
<b>Flexibility, ASTM F137</b> .....	Pass
<b>Hardness, ASTM D2240</b> .....	85
<b>James Machine, SCOF, ASTM D2047</b> .....	Neolite: 0.69; Neolite w/ Finish: 0.70
<b>Abrasion Resistance, ASTM D3884</b> .....	0.70%, 1,000 cycles
<b>Static Load (max 0.005")</b> , ASTM F970.....	650 psi
<b>Short-term Indentation, ASTM F1914</b> .....	0.003" residual indentation @ 75 lbs.
<b>Castor Chair Test, ISO TR4918</b> .....	25,000 cycles - Wear: 4.0, Color: 4.0, Change: 4.3
<b>Dimensional Stability, ASTM F2199</b> .....	0.17% loss
<b>Heat Stability, ASTM F1514</b> .....	Pass
<b>Light Stability, ASTM F1515</b> .....	Pass
<b>Critical Radiant Flux, ASTM E648</b> .....	Class 1 ≥0.45 watts/cm <sup>2</sup>
<b>Chemical Resistance, ASTM F925</b> .....	No Change

For detailed technical information, please refer to [www.lonseal.com](http://www.lonseal.com).



by **SCS** Certified.



LONSEAL, INC.  
 928 E. 238th Street, Carson, CA 90745 USA  
 800.832.7111 toll free | 310.830.7111 ph  
[www.lonseal.com](http://www.lonseal.com)



Updated: 04.14.14